



(19)

**11000391****A****(11) Publication number:**

Generated Document.

**PATENT ABSTRACTS OF JAPAN****(21) Application number: 09156299****(51) Int'l. Cl.: A61L 9/03 A45D 34/02 H05B**

3/14

**(22) Application date: 13.06.97****(30) Priority:****(43) Date of application****06.01.99****publication:****(84) Designated contracting states:****(71) Applicant: MATSUSHITA ELECTRIC IND CO LTD****(72) Inventor: HABATA ETSURO****(74) Representative:****(54) AROMATIC VESSEL****(57) Abstract:****PROBLEM TO BE****SOLVED: To prevent paralysis of the sense of****BEST AVAILABLE COPY**

smell of a human being, and maintain an effect of an aromatic by arranging a means to intermit heating of a positive characteristic thermistor heating element, and arranging the aromatic so as to be volatilized/dispersed by this heat.


**SOLUTION:** In an aromatic vessel, a sucking-up core 4 soaked in an aromatic vessel 3 is inserted into a central part through hole 2 of a positive characteristic thermistor heating element 1, and is constituted so as to volatilize/disperse an aromatic by heating this by the positive characteristic thermistor heating element 1. An interval switch set to ON for 5 minutes and OFF for 10 minutes is inserted in series to the positive characteristic thermistor

**BEST AVAILABLE COPY**

heating element 1 of the aromatic vessel, and a power source is intermittent at a constant time interval, and the aromatic is volatilized/dispersed.

Therefore, an intensity difference is made in a volatilizing/dispersing quantity of an aromatic liquid, and even if a person stays for many hours in a place where the aromatic vessel is installed, paralysis of the sense by habituation of the sense of smell can be prevented, and an effect of the aromatic vessel can be perpetuated. A display lamp may also be interposed in series confirm an operation condition of the positive characteristic thermistor heating element 1.

COPYRIGHT: (C)  
1999,JPO

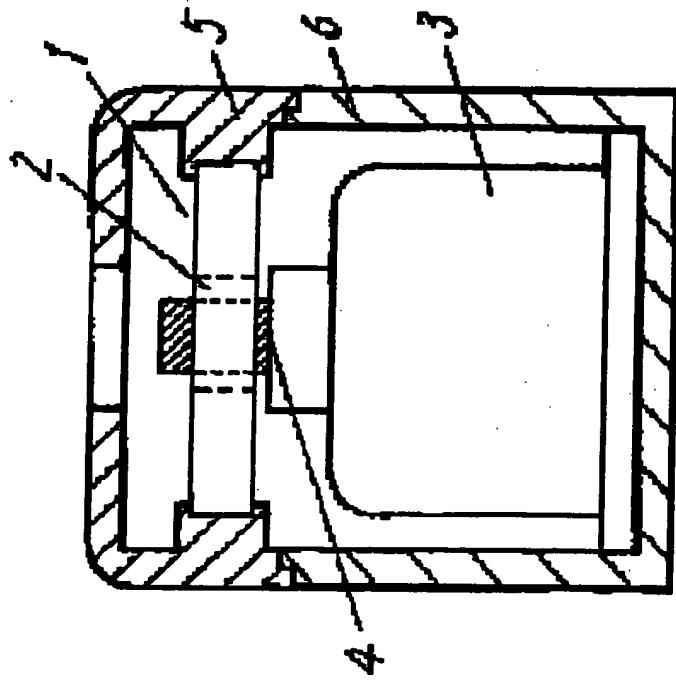

RFST AVAILABLE COPY

<http://www.delphion.com/cgi-bin/viewpat.cmd/JP11000391A2>

1  
5 of 5  
BEST AVAILABLE COPY